

LEDLUMEN[®]
LED Technologie


Your brightness is our success!

LL-SL-500-Serie





TECHNISCHE DATEN			
Model	LL-SL-500-30W	LL-SL-500-40W	LL-SL-500-50W
LED Chips Quantity	1 PCS	1 PCS	1 PCS
LED Consumption	30W	40W	50W
System Consumption	34W	45W	56W
LED Luminous Efficiency	90-110Lm /W	90-110Lm /W	90-110Lm /W
Lamp's Initial Flux	3000Lm	4000Lm	5000Lm
Color Temperature	2700K ~ 7000K	2700K ~ 7000K	2700K ~ 7000K
Lamp's Luminous Efficiency	≥80Lm /W	≥80Lm /W	≥80Lm /W
Lumen Maintenance	70%(50000Hrs)	70%(50000Hrs)	70%(50000Hrs)
Color Rendering Index	Ra≥70	Ra≥70	Ra≥70
Operating Temperature	-30°~+40°	-30°~+40°	-30°~+40°
Storage Temperature	-40°~+70°	-40°~+70°	-40°~+70°
IP Grade	IP65	IP65	IP65
Life-span	50000Hrs	50000Hrs	50000Hrs
Materials	Aluminum	Aluminum	Aluminum
Color of the lamp shell	Black	Black	Black
Mounting	Pole installation	Pole installation	Pole installation
Input Voltage/Frequency	100-240VAC 50-60Hz	100-240VAC 50-60Hz	100-240VAC 50-60Hz
Input Current(Typ)	0.29A/115VAC 0.145A/230VAC	0.4A/115VAC 0.2A/230VAC	0.5A/115VAC 0.25A/230VAC
Output Voltage	24-36V	18-36V	18-36V
Output Current	0~1.12A	1.3A	1.6A
Efficiency(Typ)	90%	90%	90%
Power Factor(Typ)	PF>0.98/115VAC PF>0.95/230VAC	PF>0.98/115VAC PF>0.95/230VAC	PF>0.98/115VAC PF>0.95/230VAC






LL-SL-500-Serie



Lichtparameter

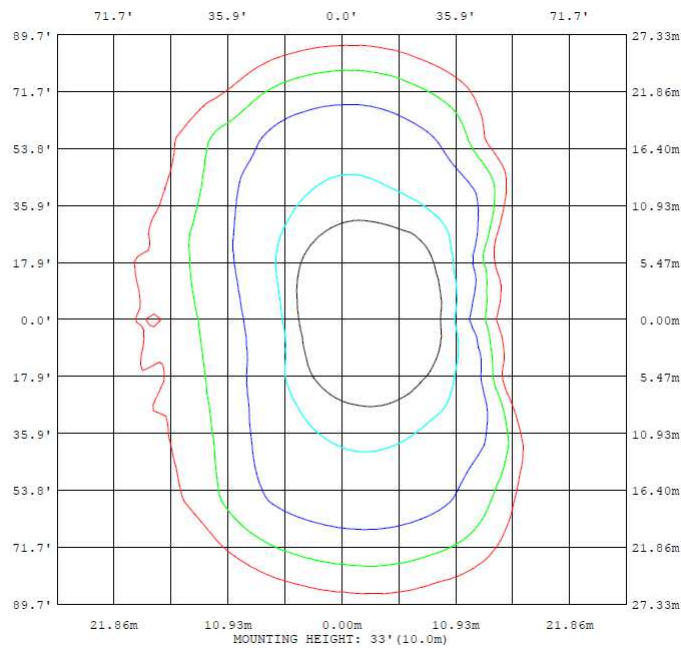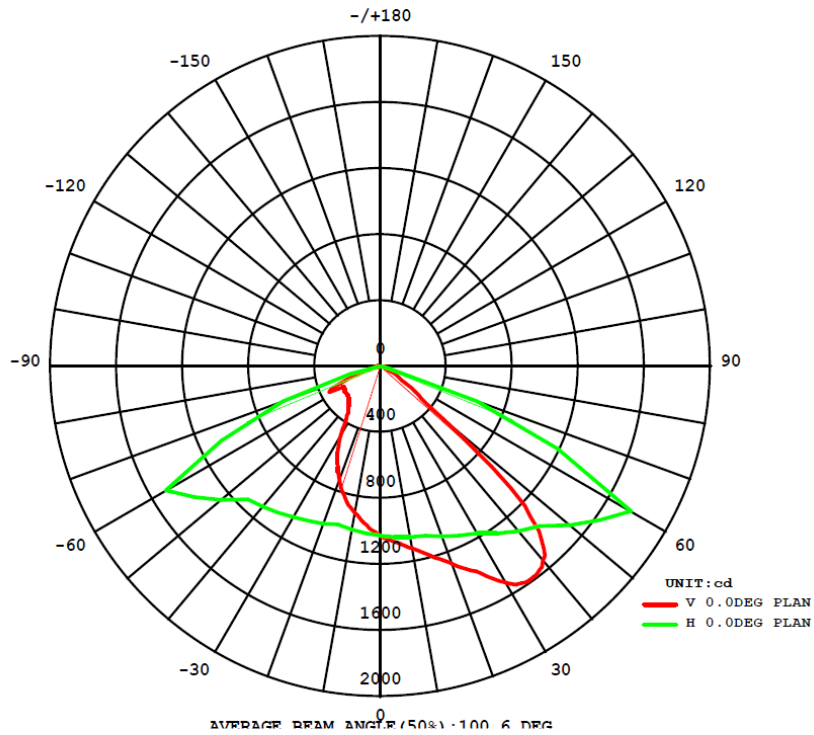



LL-SL-500-Serie

Bemaßung

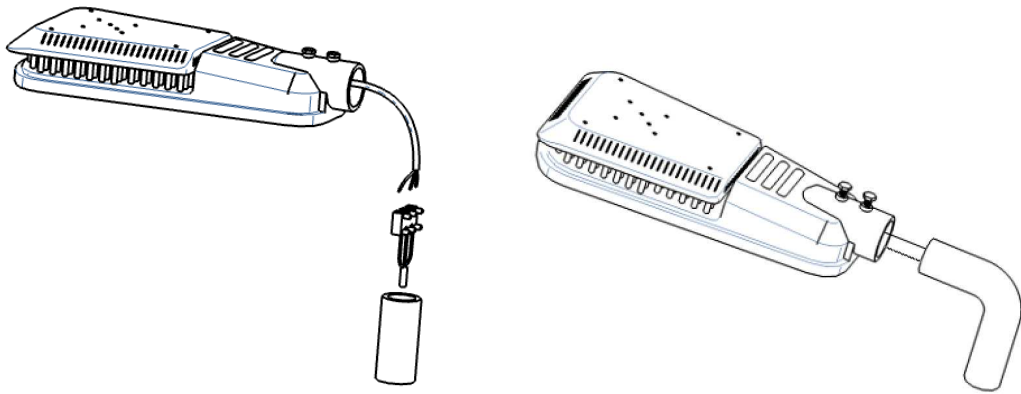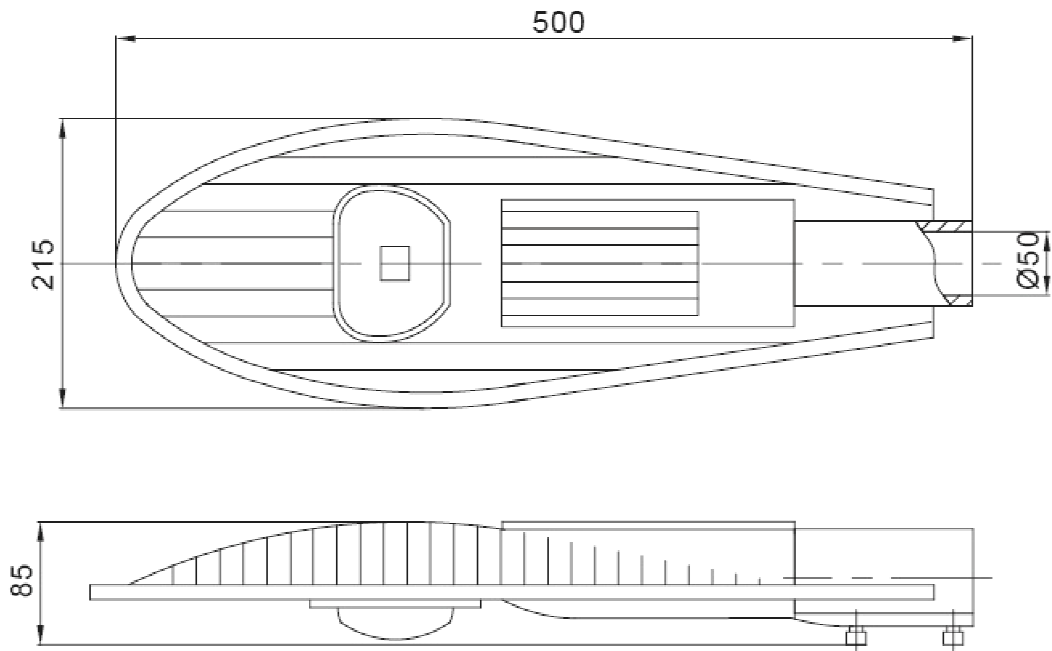

- **Alle Strahler sind mit Meanwell Driver ausgerüstet.**
- **Garantiezeit: 3 Jahre.**
- **Schutzklasse IP65**
- **Bei Bedarf dimmbar**

