

**LEDLUMEN**<sup>®</sup>  
LED Technologie


*Your brightness is our success!*

## LL-SL-703-Serie





TECHNISCHE DATEN			
Model	LL-SL-703-80W	LL-SL-703-100W	LL-SL-703-120W
LED Chips Quantity	2 PCS	2 PCS	2 PCS
LED Consumption	80W	100W	120W
System Consumption	89W	110W	134W
LED Luminous Efficiency	90-110Lm /W	90-110Lm /W	90-120Lm /W
Lamp's Initial Flux	8000Lm	10000Lm	12000Lm
Color Temperature	2700K ~ 7000K	2700K ~ 7000K	2700K ~ 7000K
Lamp's Luminous Efficiency	≥90Lm /W	≥90Lm /W	≥90Lm /W
Lumen Maintenance	70%(50000Hrs)	70%(50000Hrs)	70%(50000Hrs)
Color Rendering Index	Ra≥70	Ra≥70	Ra≥70
Operating Temperature	-30°~+40°	-30°~+40°	-30°~+40°
Storage Temperature	-40°~+70°	-40°~+70°	-40°~+70°
IP Grade	IP65	IP65	IP65
Life-span	50000Hrs	50000Hrs	50000Hrs
Materials	Aluminum	Aluminum	Aluminum
Color of the lamp shell	Black	Black	Black
Mounting	Pole installation	Pole installation	Pole installation
Input Voltage/Frequency	100-240VAC 50-60Hz	100-240VAC 50-60Hz	100-240VAC 50-60Hz
Input Current(Typ)	0.78A/115VAC 0.39A/230VAC	0.96A/115VAC 0.48A/230VAC	1.16A/115VAC 0.58A/230VAC
Output Voltage	18-36V	18-36V	18-36V
Output Current	2.6A	3.3A	4A
Efficiency(Typ)	90%	90%	90%
Power Factor(Typ)	PF>0.98/115VAC PF>0.95/230VAC	PF>0.98/115VAC PF>0.95/230VAC	PF>0.98/115VAC PF>0.95/230VAC






## LL-SL-703-Serie

### Lichtparameter

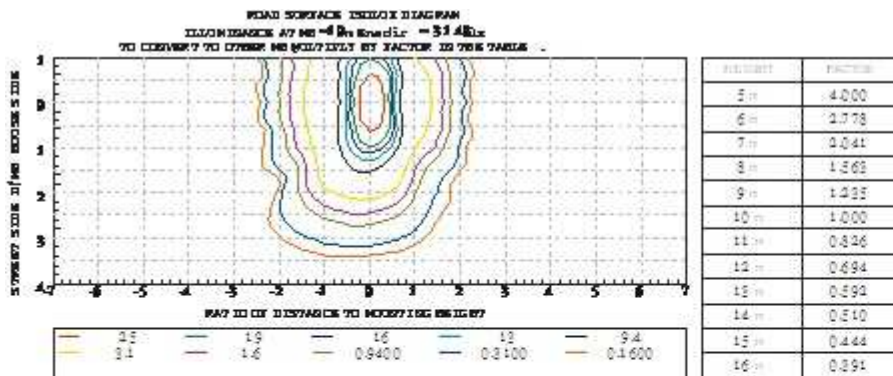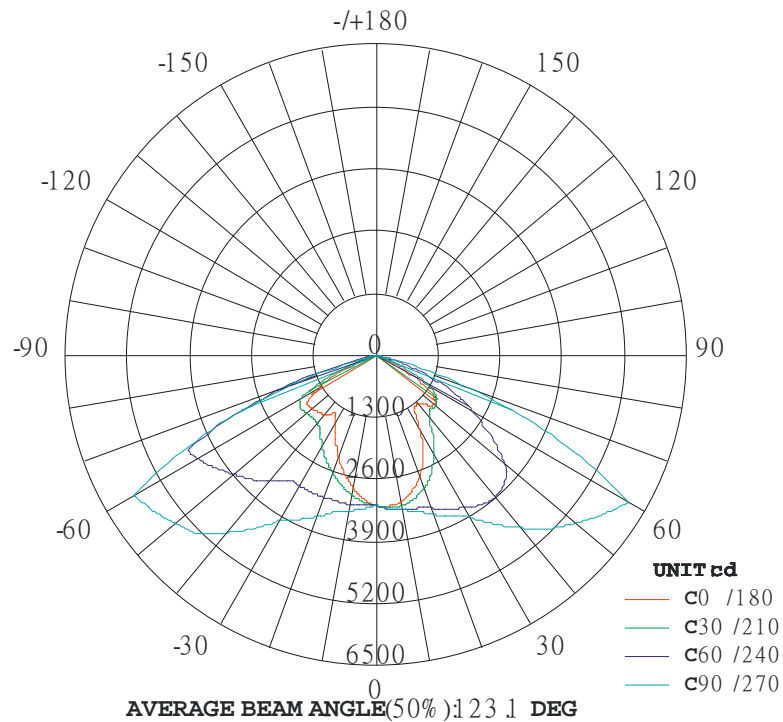





**LEDLUMEN**<sup>®</sup>  
LED Technologie

*Your brightness is our success!*

## LL-SL-703-Serie

### Bemaßung

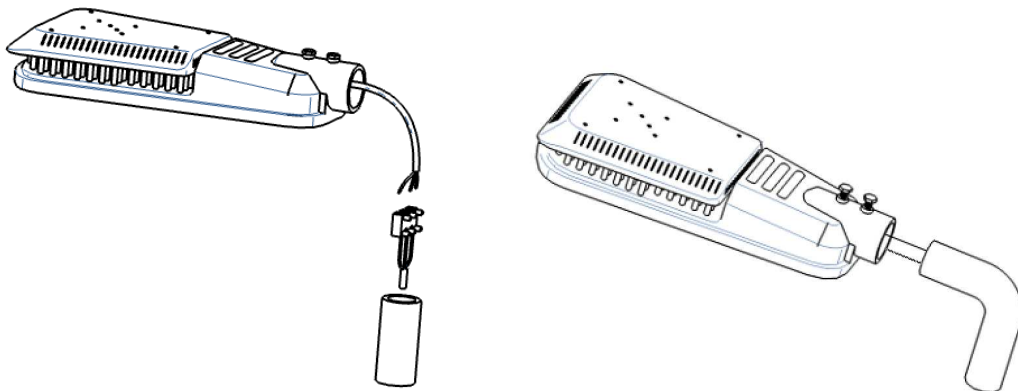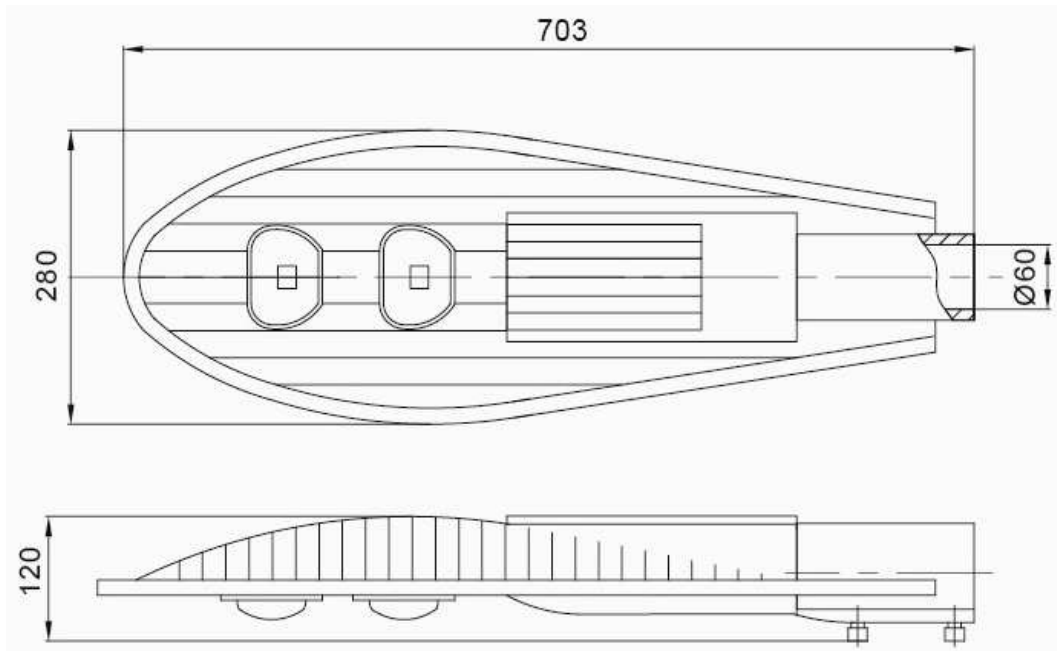

- **Alle Strahler sind mit Meanwell Driver ausgerüstet.**
- **Garantiezeit: 3 Jahre.**
- **Schutzklasse IP65**
- **Bei Bedarf dimmbar**

