

LEDLUMEN[®] *Your brightness is our success!*
LED Technologie


LL-SLY180-T3-180W



TECHNISCHE DATEN



Model	LL-SLY180-T3-180W
LED Module Quantity	6PCS(6X22 3535 LED)
LED Consumption	180W
System Consumption	198±2W
LED Luminous Efficiency	110Lm /W
Lamp's Initial Flux	>23000Lm
Color Temperature	2200K ~ 8300K
Lamp's Luminous Efficiency	90Lm /W
Illumination Uniformity	>0.6
Flux Maintenance	70%(50,000Hrs)
Light Distribution	The asymmetric bat wings
Optical Design	PC plastic LENS
Beam Angle	H 65°,V150°at the beam angle 50%
Driver Working Temperature	-30° ~ +50°
Storage Temperature	-40° ~ +70°
Life-span	50,000Hrs(Note3)
Appliance Class	Class 1
Lamp Material	Aluminum alloy
Color of the lamp shell	White/Gray
Mounting	Pole installation
Input Power Consumption	198±2W
Input Voltage/Frequency	100-277VAC; 50-60Hz
Input Current	1.72A/115VAC 0.86A/230VAC
Output Voltage	DC31±2V
Output Current	5.81±0.1A
Power Efficiency	≥92% at 230VAC
Power Factor	PF>0.98/115VAC PF>0.95/230VAC






LL-SLY180-T3-180W

Lichtparameter

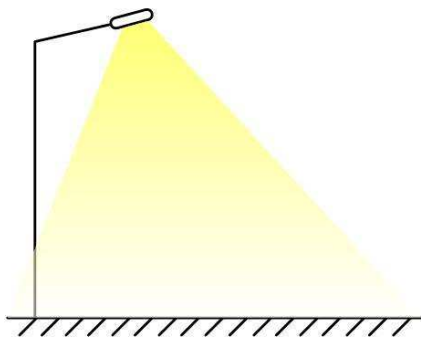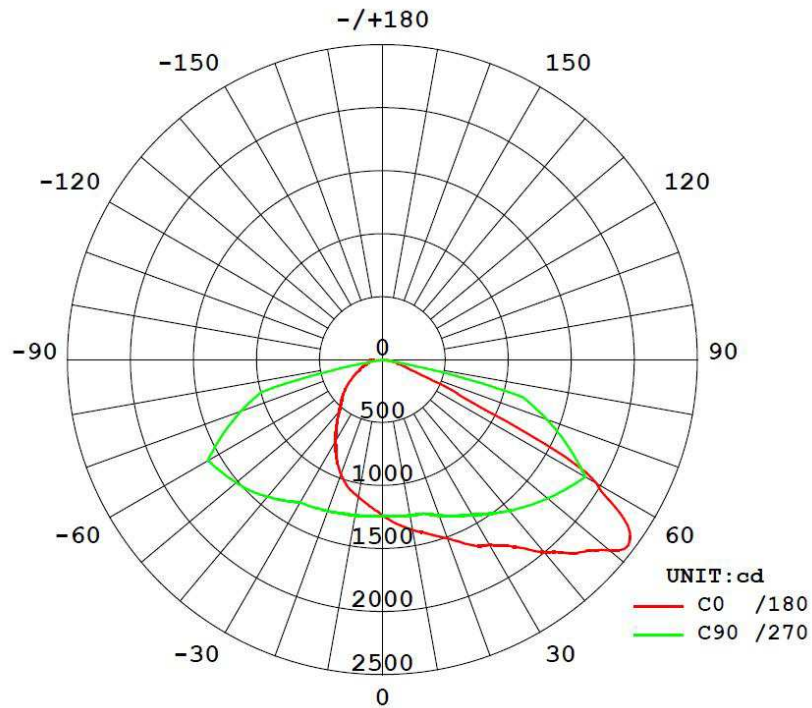


Ordinary: Angle of elevation ≈ 15 DEG

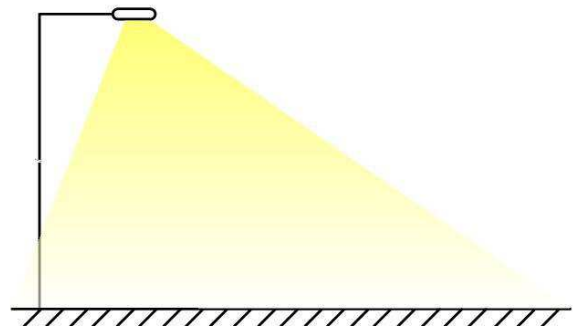


T3: Angle of elevation ≈ 0 DEG





LL-SLY180-T3-180W

Bemaßung

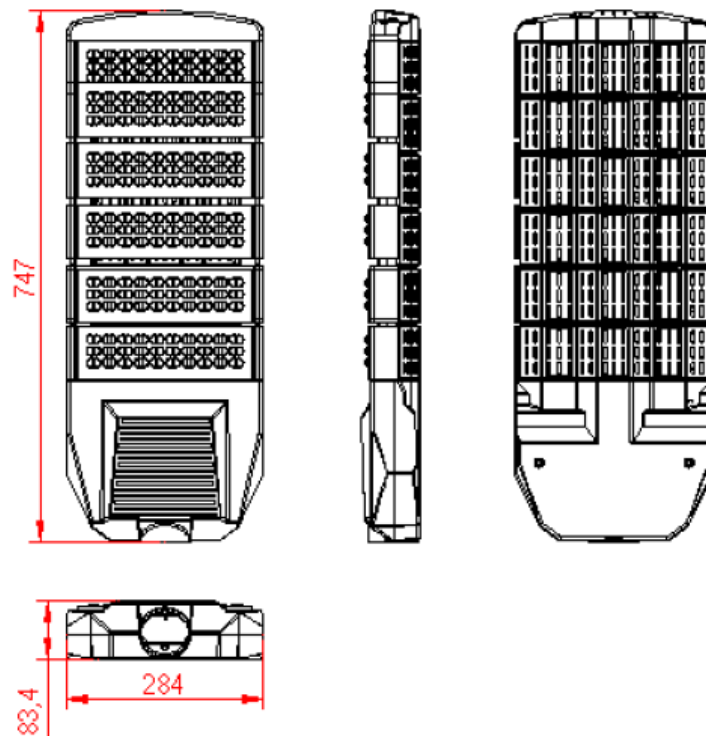

- Alle Lampen sind mit Meanwell Driver ausgerüstet
- Garantiezeit: 5 Jahre
- Schutzklasse IP65

