

LEDLUMEN[®]
LED Technologie

Your brightness is our success!


LL-GL-F1-100W



TECHNISCHE DATEN

Model	LL-GL-F1-100W
LED Chips Quantity	133 PCS(7S19P) - 60°,90°,120°
LED Consumption	91W
System Consumption	100±5W
LED Luminous Efficiency	>135Lm/W
Lamp's Initial Flux	>12200Lm
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Lamp's Luminous Efficiency	≥110Lm /W
Lumen Maintenance	70% (50.000Hrs)
Color Rendering Index	Ra≥70
Light Design	Glass lens
View Angle	60°, 90°, 120°
Driver Working Temperature	-40° ~ +60°
Storage Temperature	-40° ~ +70°
IP Rating	IP65
Life-span	≥50,000Hrs
Material	Aluminum
Color of the lamp shell	Black/Gray
Mounting	Lifting type
Input Voltage/Frequency	90-305VAC; 47-63Hz
Input Current	0.91A/115VAC 0.45A/230VAC
Output Voltage	42~48V
Output Current	0~2A
Power Efficiency	≥93%
Power Factor	PF > 0.96/115VAC PF > 0.96/230VAC PF > 0.94/277VAC









LL-GL-F1-100W

Lichtparameter



Beam Angle 60°

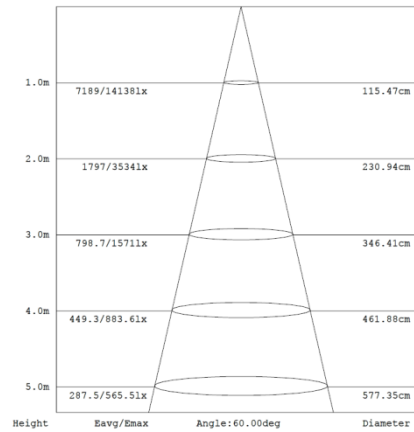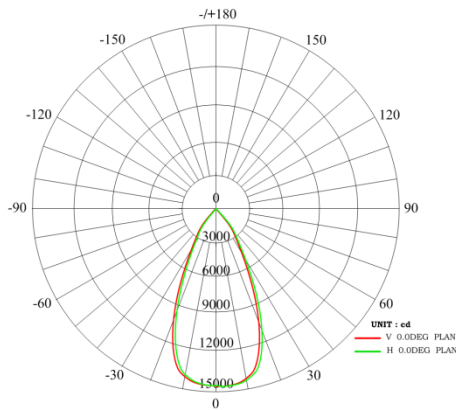


Beam Angle 90°

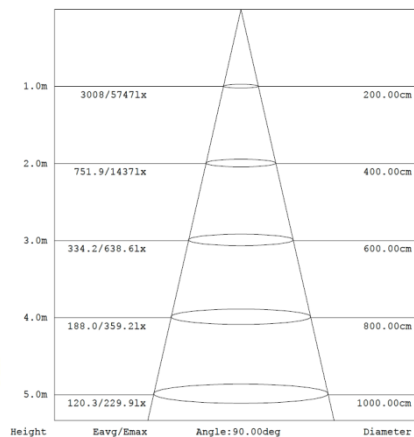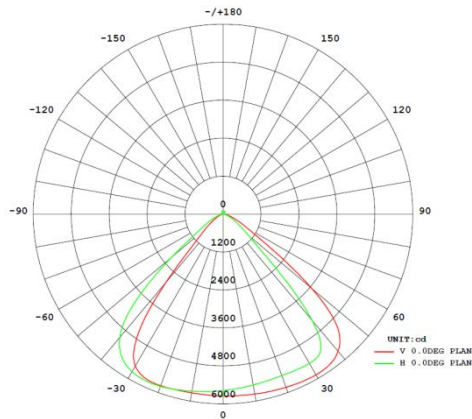

Beam Angle 120°

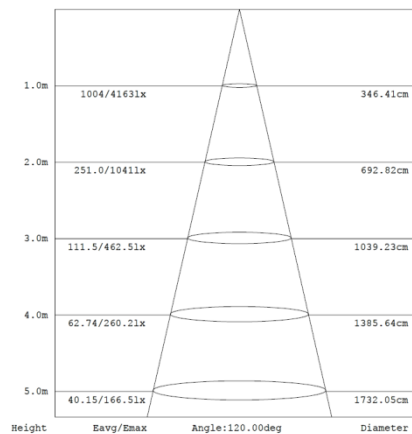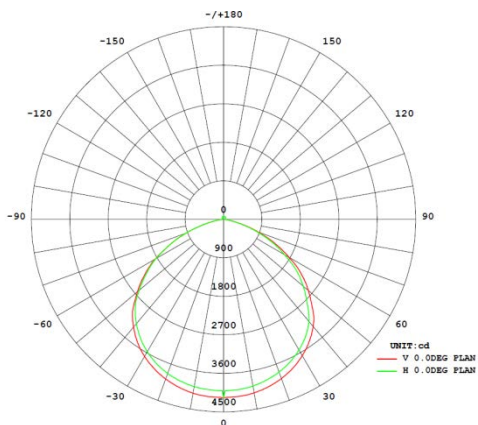




LEDLUMEN[®]
LED Technologie

Your brightness is our success!

LL-GL-F1-100W

Bemaßung

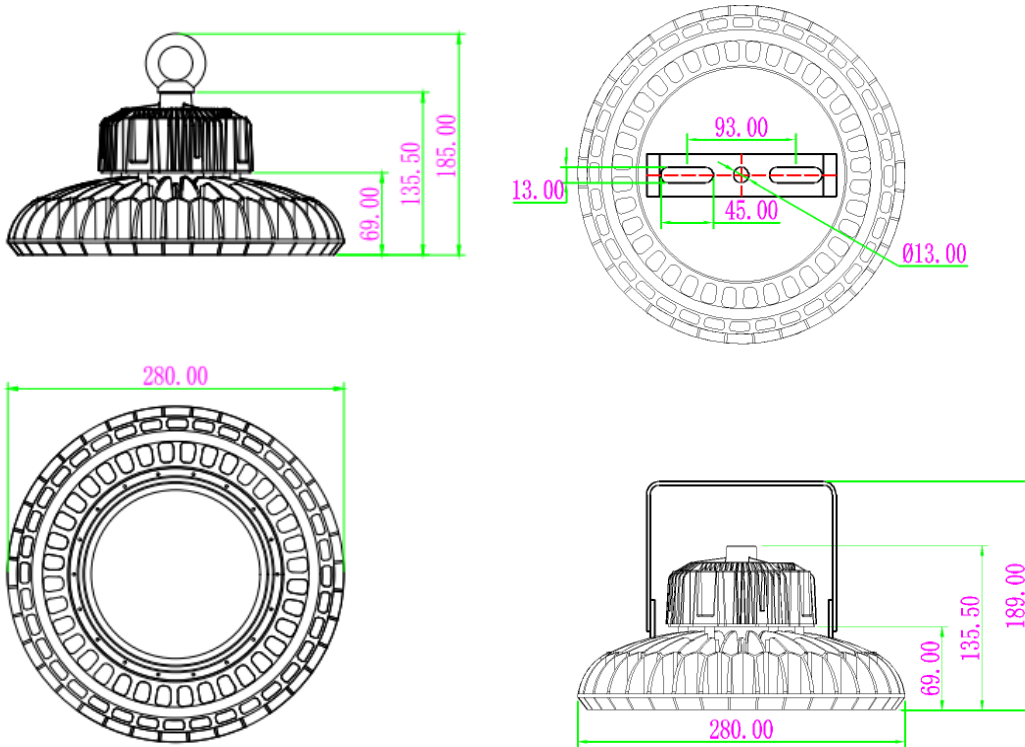

- Alle Strahler sind mit Meanwell Driver ausgerüstet
- Garantiezeit: 3 Jahre
- Schutzklasse IP65

