


LL-SDX-100W

SDX-Serie



TECHNISCHE DATEN	
Model	LL-SDX-100W
LED Quantity	96 PCS (2x48)
LED Module Working Voltage	36.6V
LED Consumption	93W
System Consumption	100±3W
LED Luminous Efficiency	>120 Lm/W
Lamp's Initial Flux	>11000 Lm
Color Temperature	2700K, 3000K, 3500K, 4000K 5000K, 5700K, 6500K
Lamp's Luminous Efficiency	≥105 Lm/W
Illumination Uniformity	0.6
Lumen Maintenance	70% (60.000Hrs)
Color Rendering Index	≥70
Optical Lens Materials	PC
Lens Angle	60°, 90°, 60°x150°
Working Temperature	-40°C ~ +65°C
Storage Temperature	-40°C ~ +80°C
Life-span	≥50.000Hrs
Appliance Class	Class I
IP Rating	IP65
Lamp Body Material	Pure Aluminum
Color of the lamp shell	Black
Mounting	Wall mounted
Input Power	100±3W
Input Voltage/Frequency	90-305VAC, 47-63Hz
Input Current	0.89/115VAC 0.46/230VAC
Output Voltage	DC36.6±1V
Output Current	2.54±0.1A
Power Efficiency	≥93% at 230VAC
Power Factor	PF > 0.98/115VAC PF > 0.95/230 VAC







LL-SDX-100W

SDX-Serie

Lichtparameter

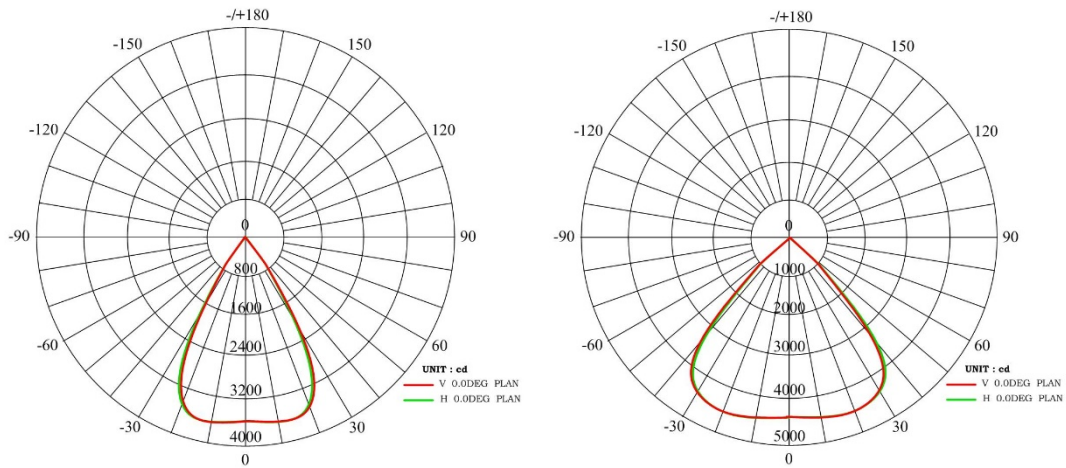

Bemaßung

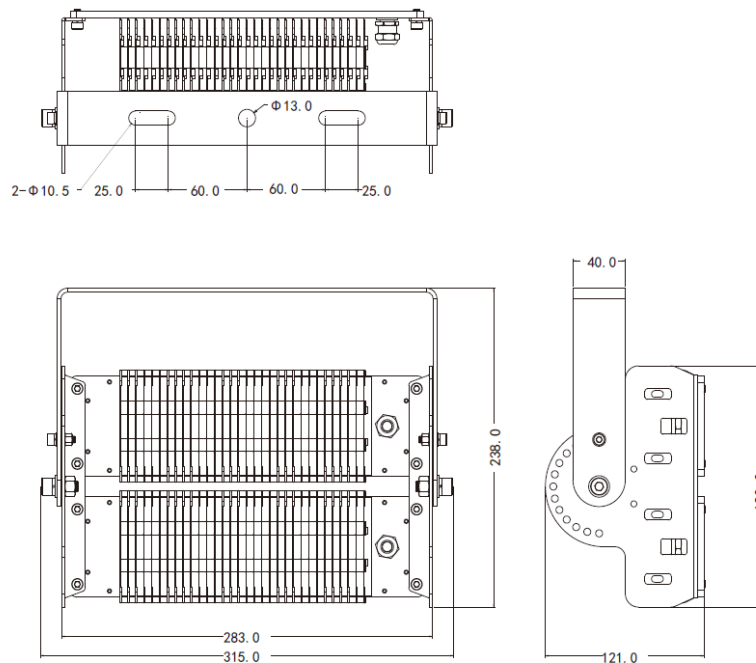

- Alle Lampen sind mit Meanwell Driver ausgerüstet
- Garanzzeit: 2 Jahre
- Schutzklasse IP65

